


The Little Oak Latch Company

Quality Handcrafted Wooden Latches

www.littleoakcompany.co.uk

Toggle Latch Fitting Instructions

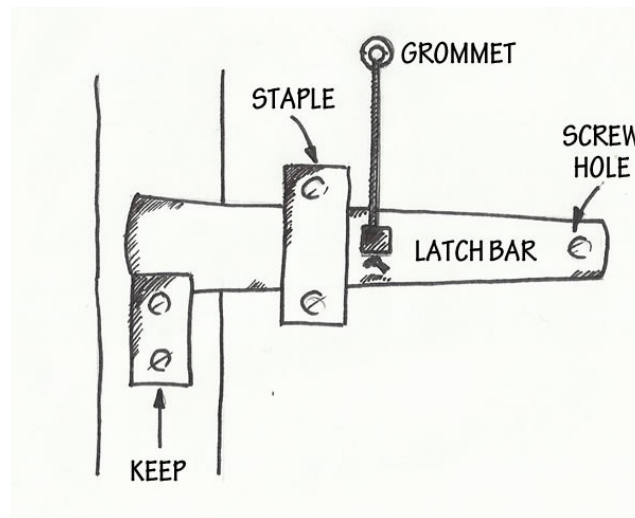

1. Position the latch bar so enough extends over the edge of the door. Drill a pilot hole and attach with a screw.
2. Attach the staple over the latch bar so that the latch bar is roughly level.
3. Drill a 13mm hole about 150mm directly above the knob on the latch bar. Fix grommets around the hole to each side of the door using the brass pins. It is recommended that a 1mm pilot hole is drilled if attaching to a hardwood door.
4. Insert the leather string through the hole, fit the toggle at the desired length and tie a knot in the string. Trim if necessary.
5. Attach the handle on the toggle side of the door at a suitable position.
6. Attach the keep onto the door frame so that the latch bar slides over the keep when the door is closed.