

# The Little Oak Latch Company



Quality Handcrafted Wooden Latches

[www.littleoakcompany.co.uk](http://www.littleoakcompany.co.uk)

## Grab Latch Fitting Instructions

1. Mark a line 100mm from the edge of the door.
2. Drill 2 holes 14 mm diameter, centres 20mm apart, along this line. Clean out the hole using a chisel.

3. Position the latch so the lever is resting through the hole and is roughly level. Drill pilot holes and attach the latch using two brass screws. If desired, tap the tapered oak plugs into the screw holes. Carefully trim and sand.

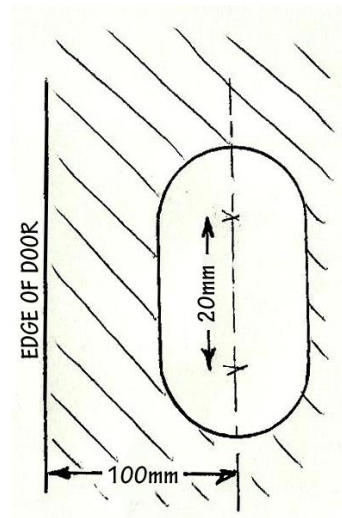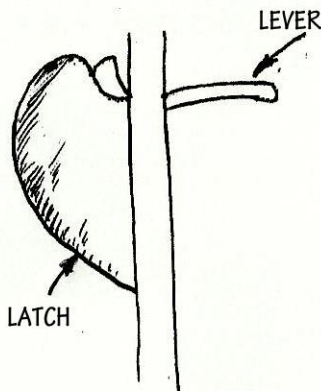

4. Position the latch bar on the other side of the door. It should rest on the lever and also extend over the edge of the door to fit over the keep. Screw.
5. Attach staple about 25mm from the edge of the door.
6. Attach the keep onto the door frame so that the latch bar slides over the keep when the door is closed.

